

# Ko/oRado

## alpha I




# Ko/oRado



## GT Sublimations Ink



## Six i3200 Heads

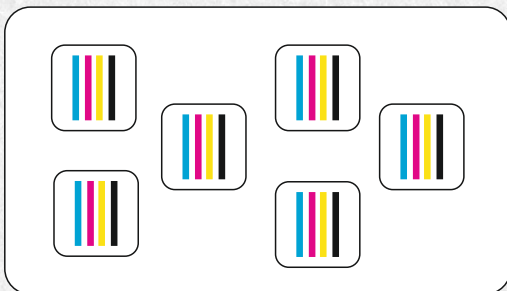

## \* 1.8m Six i3200 Print Heads Speed

360x1200dpi - 1pass

180 Lm/Hour

360x2400dpi - 2pass


110 Lm/Hour



# Industrial Dye Sublimation Printer (with 6 Heads)-(2m/2.6m optional)



## Features




Front expander ensure quick and accurate take-up in high speed printing!



Rear media balance bar ensure accurate take-up in high speed printing with low weight thin paper.



Double high-precision mute rail.




Stable 3L bulk system ensure amazing printing speed.




Inflatable take up and feed media shaft.



Integrated IR & cooling fan system.



Media retraction tension bar.



Jumbo media roll maximum 1000m media load.



## Technical Specifications (2m/2.6 optional)


Print Head	Six i3200 Print Heads	
Printing Technology	Piezoelectric Inject	
Acceptable Media	<u>Width</u>	72 in.(1830mm)
	<u>Thickness</u>	Maximum 39 mil(1mm)
	<u>Weight</u>	220ib.(100kg)
Printing Width	70.8 in.(1800mm)	
Ink Cartridges	<u>Type</u>	Dye Sublimation Ink
	<u>Capacity</u>	4*4 CISS (220ml ink cartridge with 3L ink tank)
	<u>Color</u>	4 colors (Cyan, Magenta, Yellow, Black)
Printing Resolution	Maximum 3600 dpi	
Media Heating System	Intergrated post heater & Infrared Dryer & Fan system	
Interface	USB 3.0	
Power Supply	AC 220V ± 10%, 50/60 HZ	
Dimensions (with Stand)	126.5(W)x31.5(D)x54(H) in. (3213(w)x800(D)x1370(H)mm)	
Weight (with Stand)	1102.3 lb. (500kg)	
Accessories	USB cable,media clamp, manual, drain bottle, ink cartridges, Rip Software etc.	

# KoloRado

GT Sublimations Ink



Eight i3200 Heads  
CMYK

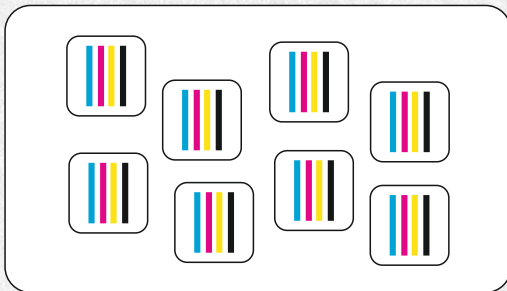

\* 1.8m Eight i3200  
Print Heads Speed

360x1200dpi - 1pass

220 Lm/Hour

360x2400dpi - 2pass


150 Lm/Hour



# Industrial Dye Sublimation Printer (with 8 Heads)



## Features



Double  
High-precision  
mute rail.




Stable 5L bulk system  
ensure amazing printing  
speed.




Front  
expander.



Rear media  
balance bar.




Media retraction  
tension Bar.



Jumbo media roll  
maximum 1000m  
media load.



Inflatable take up  
and feed media  
shaft.



Frequency motor ensure  
more stable material  
loading and take-up.



## Technical Specifications (2m optional)

Print Head	Eight i3200 Print Heads		
Printing Technology	Piezoelectric Inject		
Acceptable Media	<u>Width</u>	72 in.(1820mm)	87.8in.(2230 mm)
	<u>Thickness</u>	Maximum 39 mil(1mm)	
	<u>Weight</u>	300m	
	<u>Media Load</u>		
Printing Width	70.8 in.(1800mm)	86.6 in.(2200mm)	
Ink Cartridges	<u>Type</u>	Dye Sublimation Ink	
	<u>Capacity</u>	4*4 CISS (220ml ink cartridge with 5L ink tank)	
	<u>Color</u>	4 colors (Cyan, Magenta, Yellow, Black)	
Printing Resolution	Maximum 3600 dpi		
Media Heating System	Intergrated post heater & Infrared Dryer & Fan system		
Interface	USB 3.0	USB 3.0/LAN	
Power Supply	AC 220V ± 10%, 50/60 HZ		
Dimensions (with Stand)	133.88(W)x51.18(D)x78.74(H) in. (3400(w)x1300(D)x2000(H)mm)	149.60(W)x51.18(D)x78.74(H) in. (3800(w)x1300(D)x2000(H)mm)	
Weight (with Stand)	1433 lb. (650kg)	1653 lb. (750kg)	
Accessories	USB cable,media clamp, manual, drain bottle, ink cartridges, Rip Software etc.		



Shed No. A2/7111, Road No.71, Gate No : 01,  
G.I.D.C Sachin,Surat – 394230, (Guj.) India.

[www orangeotec.com](http://www.orangeotec.com) [sales@orangeotec.com](mailto:sales@orangeotec.com) [+91 74900 43336](tel:+917490043336)